


FRONT ELEVATION OF GRID

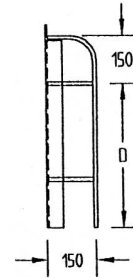


SECTION B-B


Dimension D =
Outside diameter
of pipe.

NOTES

1. All dimensions are in millimetres unless shown otherwise.
2. All steel in grids to be grade 43 to B.S. 5950, rust proofed and bitumen coated.
3. Rawl bolts to B.S. 1494
4. Cement mortar to be designation (i) to clause 2404.
5. 450 x 225 x 150 precast concrete blocks type A21 to B.S. 6073

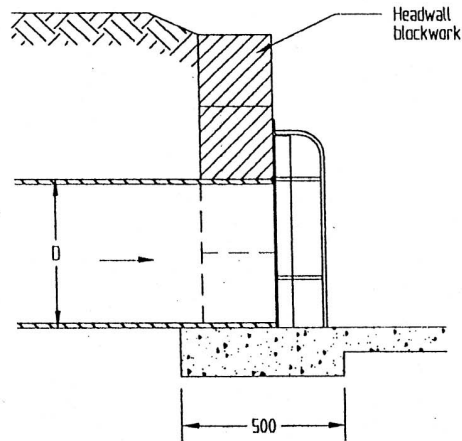

SECTION OF GRID AS
POSITIONED ON HEADWALL

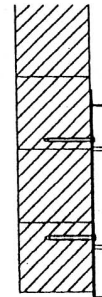

SECTION SHOWING RAWL BOLTS



David Young
Director of Environmental Services
Oxfordshire County Council
Speedwell House, Speedwell Street,
Oxford OX1 1NE
Tel. Oxford 815700

HEADWALLS: Outlet Grid Cover.

DRAINAGE

© Unauthorised reproduction infringes copyright

SCALE

Not to Scale

	INITIALS	DATE
DRAWN		
TRACED	C.A.D.	6.96
CHECKED	<i>CA</i>	4.97

INDEX	AMENDMENT	DATE
b	Minor amendments	03.97
a	Notes 3 & 5 amended	4.96

DRAWING No. HSD/5/542b CATEGORY 1