

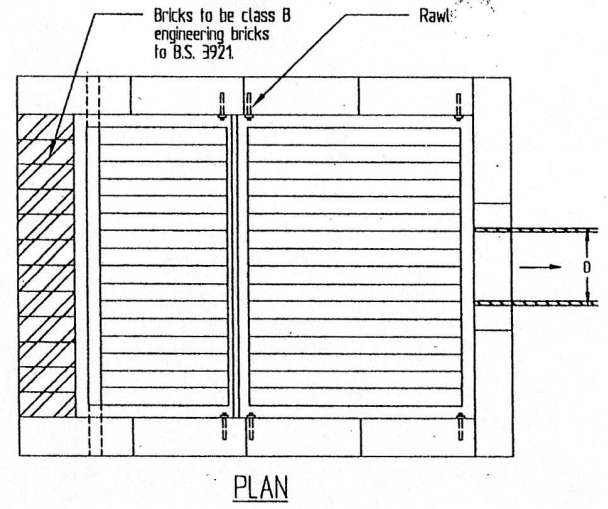
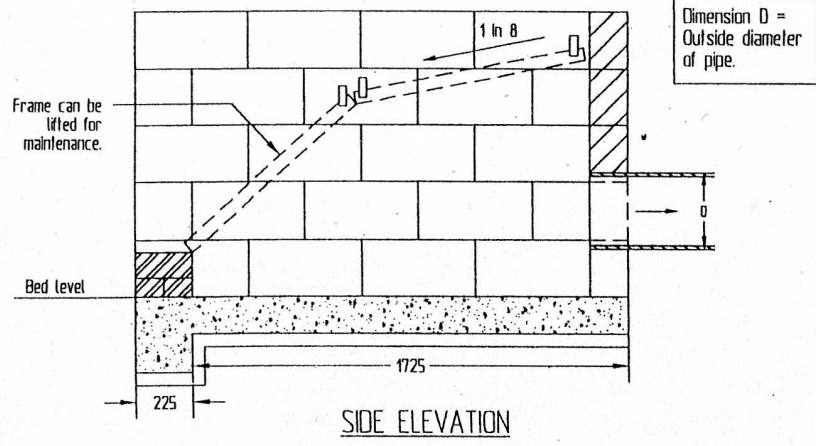
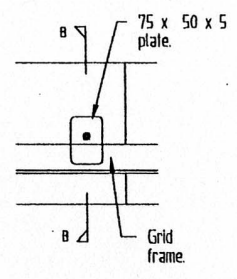
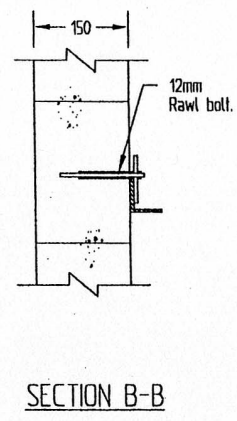


A1-49

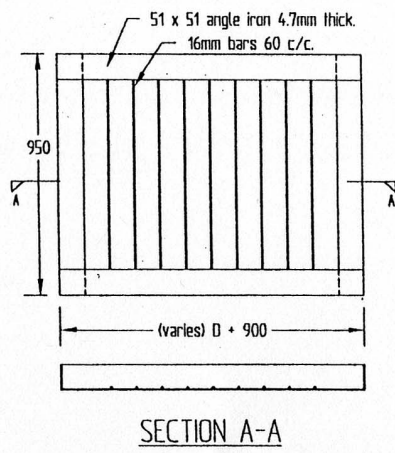

**NOTES**

1. All dimensions are in millimetres unless shown otherwise.
2. All steel in grids to be grade 43 to B.S. 5950, rust proofed and bitumen coated.
3. Rawl bolts to B.S. 1494.
4. Cement mortar to be designation (i) to clause 2404.
5. 450 x 225 x 150 precast concrete blocks type A21 to B.S. 6073.
6. Grids to be fitted to all headwalls with pipe size of 375mm or greater.

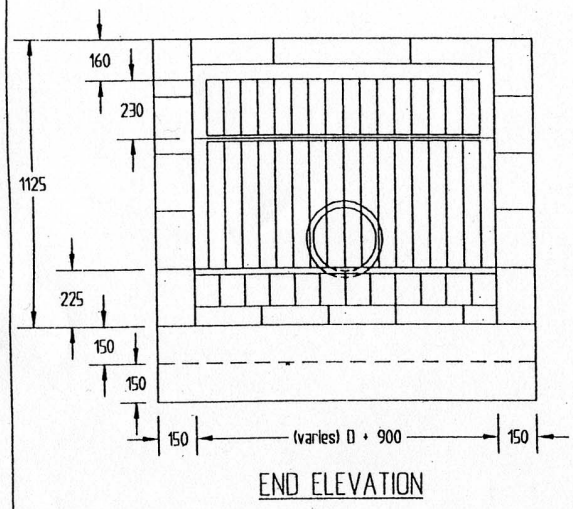

**SECTION A-A**  
GRID FRAME  
(construction detail)

**SECTION B-B**

**GRID FRAME**  
(fixing detail)



David Young  
Director of Environmental Services  
Oxfordshire County Council  
Speedwell House, Speedwell Street,  
Oxford OX1 1NE  
Tel. Oxford 815700

**HEADWALLS: Inlet grid cover.**

**DRAINAGE**

© Unauthorised reproduction infringes copyright

SCALE  
Not to Scale

DRAWN	INITIALS	DATE
TRACED	C.A.D.	6.96
CHECKED	<i>GA</i>	4.97

c	Minor amendments	0397
b	Notes 3 & 5 amended	4/96
a	Bricks specification	4/94
INDEX	AMENDMENT	DATE
DRAWING No. HSD/5/543c		CATEGORY 1